

These are the basic steps required for configuring Lista Storage Wall Systems.

Sample Full Depth Storage Wall Order

QUANTITY	PART NO.	DESCRIPTION	
3	VSF2200	vertical side frames	1
4	UP/36U	universal panels	2
1	SWLP3636/1	lock panel	2
1	SWLP3636/2	lock panel	2
1	SWLK900-RG	lock system	3
2	SB36U	sway braces (pairs)	4
2	SC75F	drawers	4
6	SC100F	drawers	4
4	SC150F	drawers	4
1	SC-TCF	roll-out tray	4
2	AS-P/36U	adjustable shelves	4
	BB	bright blue paint	6

1 Select vertical side frames

Select the vertical side frames. Keep in mind the depth and height of the system you are designing. See page 2 for full depth systems and page 4 for shallow depth systems.

2 Select universal panels and optional lock system panels

Select panel, which determines the width of the section. See page 6 for locking system choices.

3 Select rear and end panels

Select rear panel or sway braces and optional end panels. See page 2 for full depth systems and page 4 for shallow depth systems.

4 Select drawers, shelves and roll-out trays

Select the correct-sized drawers, shelves and roll-out trays for the system you are designing. See page 3 for full depth system components and page 5 for shallow depth system components.

5 Select system options

Select doors, bookcases and/or ladders from the options shown on pages 7-9.

6 Select paint colors

Select color(s) from the color chart below. System frame and panels can be a different color from drawer fronts, but drawer interiors are always gray.



BE (Beige paint)	BB (Bright Blue paint)	BK (Black paint)	CB (Classic Blue paint)
GR (Dark Gray paint)	GG (Green paint)	LG (Light Gray paint)	NR (Red paint)
SN (Sand paint)	FW (White paint)		

Full depth Storage Wall sections (27 3/4" deep) come in three different widths. Panel/section widths correspond to Lista Standard, Mid- and Double Width components.

At any time, additional sections can be added, and drawers, roll-out trays, and shelves can be easily reconfigured to accommodate growth and changing needs.

Ordering

All basic components are ordered separately from the charts on these two pages. Be sure to match the width of the drawers, shelves, etc. to the section width you are building. For step-by-step directions for ordering, see page 1.

Please note that the final digits in the part numbers for universal panels, sway braces and rear panels indicate width in units:

- 36U for Standard Width
- 64U for Mid-Width
- 78U for Double Width

Vertical Side Frames

Heavy duty one-piece vertical uprights with welded horizontal struts. Vertical uprights are slotted at 1" increments for placement of drawers, roll-out trays or shelves. Color: to match unit.



PART NO.	OVERALL HT.	USABLE HT.
VSF1000	39 3/8"	35 7/16" (900mm)
VSF1450	57 1/8"	53 1/8" (1350mm)
VSF2000	78 3/4"	74 3/4" (1900mm)
VSF2200	86 5/8"	80 3/4" (2050mm)
VSF2500	98 7/16"	92 1/2" (2350mm)
VSF3000	118 1/8"	114 1/4" (2850mm)

Length of Storage Wall Systems

To determine actual Storage Wall length, add together the sections you are assembling and add an additional 2". If end panels are used, add 2 9/32" for each.

SECTION WIDTH	LENGTH BETWEEN SIDE FRAME CTRS.
standard (36 units)	28 1/8" (714mm)
mid-width (64 units)	46 7/8" (1190mm)
double width (78 units)	56 1/4" (1428mm)

End Panels

These optional steel sheet panels enclose the ends of the completed units. Hardware included. Color: to match unit.

PART NO.	HEIGHT
EP1000	39 3/8" (1000mm)
EP1450	57 1/8" (1450mm)
EP2000	78 3/4" (2000mm)
EP2200	86 5/8" (2200mm)
EP2500	98 7/16" (2500mm)
EP3000	118 1/8" (3000mm)



Universal Panels

Steel sheet universal panels measure 2" (50mm) in height and are fastened to the top and bottom of the vertical side frames to complete each section. Sections with vertical side frames 2200 or greater must have a third intermediate universal panel. Fasteners are included. Color: to match unit. For panels that accept the lock system, see page 6.

Universal Panels

PART NO.	WIDTH	LOAD CAP.
UP/36U	26" (661mm)	550 lbs. (250kg)
UP/64U	44 3/4" (1137mm)	550 lbs. (250kg)
UP/78U	54 1/8" (1375mm)	550 lbs. (250kg)

Universal Panels with Mounting Holes

For use with counter tops, tambour doors (top panel only) and double hinged doors (top and bottom panel).

PART NO.	WIDTH	LOAD CAP.
UP/36U-UM	26" (661mm)	550 lbs. (250kg)
UP/64U-UM	44 3/4" (1137mm)	550 lbs. (250kg)
UP/78U-UM	54 1/8" (1375mm)	550 lbs. (250kg)

Rear Panels

Panels are bolted to the vertical side frames to enclose the rear of each section and provide lateral stability. Rear panels must be fitted at least every fourth section. Fasteners included. Color: to match unit. Sway braces can be substituted.

PART NO.	HEIGHT
Standard width 28 1/8" (714mm) – 36 units	
RP1000/36U	39 3/8" (1000mm)
RP1450/36U	57 1/8" (1450mm)
RP2000/36U	78 3/4" (2000mm)
RP2200/36U	86 5/8" (2200mm)
RP2500/36U	98 7/16" (2500mm)
RP3000/36U	118 1/8" (3000mm)
Mid-width 46 7/8" (1190mm) – 64 units	
RP1000/64U	39 3/8" (1000mm)
RP1450/64U	57 1/8" (1450mm)
RP2000/64U	78 3/4" (2000mm)
RP2200/64U	86 5/8" (2200mm)
RP2500/64U	98 7/16" (2500mm)
RP3000/64U	118 1/8" (3000mm)
Double width 56 1/4" (1428mm) – 78 units	
RP1000/78U	39 3/8" (1000mm)
RP1450/78U	57 1/8" (1450mm)
RP2000/78U	78 3/4" (2000mm)
RP2200/78U	86 5/8" (2200mm)
RP2500/78U	98 7/16" (2500mm)
RP3000/78U	118 1/8" (3000mm)

Sway Braces

Used for units without rear panels to provide the necessary lateral stability. Diagonal braces must be fitted at least every fourth section. Color: to match unit. Supplied in pairs with fasteners included.

PART NO.	WIDTH
SB36U	28 1/8" (714mm)
SB64U	46 7/8" (1190mm)
SB78U	56 1/4" (1428mm)



Roll-Out Trays

Roll-out trays can be mounted in any sequence or combination with drawers and shelves. Each tray uses the equivalent height of a 100 drawer (100mm high). Trays have full length handles, galvanized insert panels, and 1 3/4" rear and side retaining walls. Be sure to order trays to match the particular section width you are outfitting.

- Usable depth of tray is 24".
- Weight capacity is 440 lbs. for evenly distributed loads.

PART NO.	SECTION	USABLE WIDTH
SC-TCF	36U (standard)	24" (610mm)
MW-TCF	64U (mid-width)	42 13/16" (1088mm)
DW-TCF	78U (double wid.)	52 3/16" (1326mm)



Heavy Duty Roll-Out Tray

Trays have full length handles and galvanized insert panels. Each tray uses the equivalent height of a 225 drawer (225mm high). Available for standard width sections only. Use of individual drawer latch and retainer strip is required (see page 6).

- Usable depth of tray is 24".
- Weight capacity is 770 lbs. for evenly distributed loads.

PART NO.	SECTION	USABLE WIDTH
HDTCF/SC	36U (standard)	23" (584mm)



Adjustable Shelves

Steel shelves can easily be moved at any time and used in any combination or sequence with drawers and roll-out trays. Shelves are 1" (25mm) high. Shelf support clips are included. Color: to match unit. Be sure to order shelves to match the particular section width you are outfitting.

- Usable depth of shelf is 27 1/2".
- Shelves have a 440 lb. maximum load capacity for evenly-distributed loads.

PART NO.	SECTION	USABLE WIDTH
AS-P/36U	36U (standard)	26" (661mm)
AS-P/64U	64U (mid-width)	44 3/4" (1137mm)
AS-P/78U	78U (double wid.)	54 1/8" (1375mm)



Shelf Dividers

Steel sheet dividers fit over lip of shelf. Color: to match shelves.

PART NO.	HEIGHT
SWSD100/36	4" (100mm)
SWSD150/36	6" (150mm)
SWSD200/36	8" (200mm)



Self-Adhesive Label Holders

Plastic hinged label holder adheres to face of shelf to allow identification of shelf contents. 13/16" high. Does not include label paper. For Lista Script, use 18.932 labels.

PART NO.	LENGTH
18.926	4 1/8" (105mm)
18.927	8 1/4" (210mm)
18.929	39 3/8" (1000mm)



Shelf End Panels

Steel sheet panel, 26" long, provides side wall for shelves. Color: to match unit. Inserted without additional hardware.

PART NO.	HEIGHT	MIN. SHELF SPACING
X684/3	5 15/16" (150mm)	7 7/8" (200mm)
X684/5	7 7/8" (200mm)	9 7/8" (250mm)
X684/7	9 7/8" (250mm)	11 3/4" (300mm)



Frame Top Fill-In Strip

Steel sheet strip, covers top of vertical side frames to create a smooth continuous surface. Not for use with sliding doors or vertical tambour doors. Color: to match unit.

PART NO.
X699



Intermediate Fill-In Strip

Steel sheet strip fills the space created by vertical side frames between shelves or universal panels to create a smooth continuous shelf surface. Must be used between 2 shelves or 2 universal panels. Color: to match unit. Retainer clip included.

PART NO.
X700

Shallow depth Storage Wall sections (21 3/4" deep) come in two different widths. Panel/section widths correspond to Lista ST and HS Width components.

At any time, additional sections can be added, and drawers, roll-out trays, and shelves can be easily reconfigured to accommodate growth and changing needs.

Ordering

All basic components are ordered separately from the charts on these two pages. Be sure to match the width of the drawers, etc. to the section width you are building. For step-by-step directions for ordering, see page 1.

Please note that the final digits in the part numbers for universal panels, sway braces and rear panels indicate width in units:

- 36U for ST Width
- 54U for HS Width

Vertical Side Frames

Heavy duty one-piece vertical uprights with welded horizontal struts. Vertical uprights are slotted at 1" increments for placement of drawers, roll-out trays or shelves. Color: to match unit.



PART NO.	OVERALL USABLE	
	HEIGHT	HEIGHT
VSF1000/B255	39 3/8"	35 7/16" (900mm)
VSF1450/B255	57 1/8"	53 1/8" (1350mm)
VSF2000/B255	78 3/4"	74 3/4" (1900mm)
VSF2200/B255	86 5/8"	80 3/4" (2050mm)
VSF2500/B255	98 7/16"	92 1/2" (2350mm)
VSF3000/B255	118 1/8"	112 1/4" (2850mm)

Length of Storage Wall Systems

To determine actual Storage Wall length, add together the sections you are assembling and add an additional 2". If end panels are used, add 29/32" for each.

SECTION WIDTH	LENGTH BETWEEN
	SIDE FRAME CTRS.
ST (36 units)	28 1/8" (714mm)
HS (54 units)	40 5/32" (1020mm)

End Panels

These optional panels enclose the ends of the completed units. Hardware included. Color: to match unit.

PART NO.	HEIGHT
EP1000/B255	39 3/8" (1000mm)
EP1450/B255	57 1/8" (1450mm)
EP2000/B255	78 3/4" (2000mm)
EP2200/B255	86 5/8" (2200mm)
EP2500/B255	98 7/16" (2500mm)
EP3000/B255	118 1/8" (3000mm)



Universal Panels

Steel sheet universal panels measure 2" (50mm) in height and are fastened to the top and bottom of the vertical side frames to complete each section. Sections with vertical side frames 2200 or greater must have a third intermediate universal panel. Fasteners are included. Color: to match unit. For panels that accept the lock system, see page 6.

Universal Panels

PART NO.	WIDTH	LOAD CAPACITY
UP/3627U	26" (661mm)	550 lbs. (250kg)
UP/54U	38" (967mm)	550 lbs. (250kg)

Universal Panels with Mounting Holes

For use with counter tops, tambour doors (top panel only) and double hinged doors (top and bottom panel).

PART NO.	WIDTH	LOAD CAPACITY
UP/3627U-UM	26" (661mm)	550 lbs. (250kg)
UP/54U-UM	38" (967mm)	550 lbs. (250kg)

Rear Panels

Panels are bolted to the vertical side frames to enclose the rear of each section and provide lateral stability. Rear panels must be fitted at least every fourth section. Fasteners included. Color: to match unit. Sway braces can be substituted.

PART NO.	HEIGHT
ST width 28 1/8" (714mm) – 36 units	
RP1000/36U	39 3/8" (1000mm)
RP1450/36U	57 1/8" (1450mm)
RP2000/36U	78 3/4" (2000mm)
RP2200/36U	86 5/8" (2200mm)
RP2500/36U	98 7/16" (2500mm)
RP3000/36U	118 1/8" (3000mm)
HS width 40 1/8" (1020mm) – 54 units	
RP1000/54U	39 3/8" (1000mm)
RP1450/54U	57 1/8" (1450mm)
RP2000/54U	78 3/4" (2000mm)
RP2200/54U	86 5/8" (2200mm)
RP2500/54U	98 7/16" (2500mm)
RP3000/54U	118 1/8" (3000mm)

Sway Braces

Used for units without rear panels to provide the necessary lateral stability. Diagonal braces must be fitted at least every fourth section. Color: to match unit. Supplied in pairs with fasteners included.

PART NO.	WIDTH
SB36U	28 1/8" (714mm)
SB54U	40 1/8" (1020mm)



Roll-Out Trays

Roll-out trays can be mounted in any sequence or combination with drawers and shelves. Each tray uses the equivalent height of a 100 drawer (100mm high). Trays have full length handles, galvanized insert panels, and 1 3/4" rear and side retaining walls. Be sure to order trays to match the particular section width you are outfitting.

- Usable depth of tray is 18".
- Weight capacity is 440 lbs. for evenly distributed loads.

PART NO.	SECTION	USABLE WIDTH
ST-TCF	36U (ST)	24" (610mm)
HS-TCF	54U (HS)	36 1/8" (918mm)



Heavy Duty Roll-Out Tray

Trays have full length handles and galvanized insert panels. Each tray uses the equivalent height of a 225 drawer (225mm high). Available for HS width sections only. Use of individual drawer latch and retainer strip is required (see page 6).

- Usable depth of tray is 18".
- Weight capacity is 770 lbs. for evenly distributed loads.

PART NO.	SECTION	USABLE WIDTH
HDTCF/HS	54U (HS)	35 1/8" (892mm)



Adjustable Shelves

Steel shelves can easily be moved at any time and used in any combination or sequence with drawers and roll-out trays. Shelves are 1" (25mm) high. Shelf support clips are included. Color: to match unit. Be sure to order shelves to match the particular section width you are outfitting.

- Usable depth of shelf is 21 3/4".
- Weight capacity is 440 lbs. for evenly distributed loads.

PART NO.	SECTION	USABLE WIDTH
AS-P/3627U	36U (ST)	26" (661mm)
AS-P/54U	54U (HS)	38" (967mm)



Shelf Dividers

Steel sheet dividers fit over lip of shelf. Color: to match shelves.

PART NO.	HEIGHT
SWSD100/27	4" (100mm)
SWSD150/27	6" (150mm)
SWSD200/27	8" (200mm)



Self-Adhesive Label Holders

Plastic hinged label holder adheres to face of shelf to allow identification of shelf contents. 1 3/16" high. Does not include label paper. For Lista Script, use 18.932 labels.

PART NO.	LENGTH
18.926	4 1/8" (105mm)
18.927	8 1/4" (210mm)
18.929	39 3/8" (1000mm)



Shelf End Panels

Steel sheet panel provides side wall for shelves. Color: to match unit. Inserted without additional hardware.

PART NO.	HEIGHT	MIN. SHELF SPACING
X612/03	5 15/16" (150mm)	7 7/8" (200mm)
X612/05	7 7/8" (200mm)	9 7/8" (250mm)
X612/07	9 7/8" (250mm)	11 3/4" (300mm)



Frame Top Fill-In Strip

Steel sheet strip, covers top of vertical side frames to create a smooth continuous surface. Not for use with sliding doors or vertical tambour doors. Color: to match unit.

PART NO.
X611



Intermediate Fill-In Strip

Steel sheet strip fills the space created by vertical side frames between shelves or universal panels to create a smooth continuous shelf surface. Must be used between 2 shelves or 2 universal panels. Color: to match unit. Retainer clip included.

PART NO.
X610



For a variety of security needs, Lista offers individual, keyed-alike or master key locking systems for drawer sections. If you wish to lock and secure sections made up of a combination of drawers, roll-out trays and/or shelves, choose from the doors shown on pages 8-9.

How to order a lock system

1. Select the appropriate size and type of panels needed to match the Storage Wall section you are building. See the illustrations to the right to find the panels needed for the configuration you have chosen (partial or full height section).
2. Select the appropriate lock system based on the configuration you have chosen (partial or full height section). See ordering example on page 1.
3. ■ Select lock type.
 - RG = individual
 - KA = keyed-alike
 - MA = master

EXAMPLE: to lock a 2200 height Standard Width (36 unit wide) Storage Wall section containing a 900 height group of drawers below the lock and a 1300 height group of drawers above the lock with an individual lock, you would need to order (1) **SWLP3636/1** panel at the bottom, (1) **SWLP3636/2** panel at the top and (1) **SWLP3636/3** panel at the center, and an **SWLK2200-RG** lock system.

Panels for Lock System

Same basic construction as universal panels but equipped for installation of lock system. Color: to match unit.

Full Depth Storage Wall System

PART NO.	USABLE WID.	LOAD CAP.
Standard width – 36 units		
SWLP3636/1	26" (661mm)	440 lbs. (200kg)
SWLP3636/2	26" (661mm)	440 lbs. (200kg)
SWLP3636/3	26" (661mm)	440 lbs. (200kg)
Mid-width – 64 units		
SWLP6436/1	44 3/4" (1137mm)	440 lbs. (200kg)
SWLP6436/2	44 3/4" (1137mm)	440 lbs. (200kg)
SWLP6436/3	44 3/4" (1137mm)	440 lbs. (200kg)
Double width – 78 units		
SWLP7836/1	54 1/8" (1375mm)	440 lbs. (200kg)
SWLP7836/2	54 1/8" (1375mm)	440 lbs. (200kg)
SWLP7836/3	54 1/8" (1375mm)	440 lbs. (200kg)


Shallow Depth Storage Wall System

PART NO.	USABLE WID.	LOAD CAP.
ST width – 36 units		
SWLP3627/1	26" (661mm)	440 lbs. (200kg)
SWLP3627/2	26" (661mm)	440 lbs. (200kg)
SWLP3627/3	26" (661mm)	440 lbs. (200kg)
HS width – 54 units		
SWLP5427/1	38" (967mm)	440 lbs. (200kg)
SWLP5427/2	38" (967mm)	440 lbs. (200kg)
SWLP5427/3	38" (967mm)	440 lbs. (200kg)



Lock Systems


For locking a partial height section of drawers. Locks all drawers located below the lock.



PART NO.	DRAWER SECTION HEIGHT
SWLK300-■	11 3/4" (300mm)
SWLK600-■	23 9/16" (600mm)
SWLK750-■	29 9/16" (750mm)
SWLK900-■	35 7/16" (900mm)
SWLK1050-■	41 5/16" (1050mm)
SWLK1225-■	48 1/4" (1225mm)
SWLK1350-■	53 3/16" (1350mm)
SWLK1525-■	60" (1525mm)

Lock Systems for Full Height Drawer Section

For Storage Wall section that contains only drawers top-to-bottom. Locks all drawers located above and below the lock. **Lower section must be 900 height.**

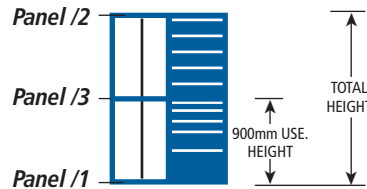

PART NO.	STORAGE WALL TOTAL HT.
SWLK2000-■	74 3/4" (1900mm)
SWLK2200-■	80 3/4" (2050mm)
SWLK2500-■	92 1/2" (2350mm)
SWLK3000-■	112 1/4" (2850mm)

Retainer strip



Individual Drawer Latch (IDL)

Individual drawer latches lock drawers and roll-out trays closed. Particularly suitable for mobile applications or where seismic activity is a consideration. Finger pull latches are recessed and mounted on the right side of the drawer handle. Can be added at any time. Requires retainer strip (ordered separately – see below).

PART NO.
IDL

Retainer Strips

Strips bolt to vertical side frame to secure individual drawer latches. **These strips are necessary for IDLs.**

PART NO.	HEIGHT
VP-IDL/1000	39 3/8" (1000mm)
VP-IDL/1450	57 1/8" (1450mm)
VP-IDL/2000	78 3/4" (2000mm)
VP-IDL/2200	86 5/8" (2200mm)
VP-IDL/2500	98 7/16" (2500mm)
VP-IDL/3000	118 1/8" (3000mm)



Lock-In-Lock-Out (LILO)

These safety devices lock drawers in fully opened or fully closed positions. LILO is primarily used in mobile applications or where seismic activity is a consideration. Part number is for individual LILO device only; drawers must be ordered separately. Only available for 440 lb. (200kg) suspension drawers.

PART NO.
LILO



These offerings make your Storage Wall System even more versatile. The bookcase and counter top are available for both full depth and shallow depth Storage Wall Systems.

Bookcases

Overhead bookcase offers quick access to reference materials and manuals. Bookcase is 12 5/8" deep, with a useable depth of 11 7/8". Color: to match unit.

PART NO.	FOR USE WITH	USE WIDTH
BC36U	full and shallow depth	25 7/8"
BC54U	shallow depth	37 7/8"
BC64U	full depth	44 1/2"
BC78U*	full and shallow depth	54"

*for (1) 78U or (2) 36U

Butcher Block Counter Tops

Counter style worktop is 1 3/4" thick butcher block hardwood. Mounts on top of universal panel with mounting holes (see pages 2 and 4).

PART NO.	FOR USE WITH
BCT/3627U	shallow depth
BCT/3636U	full depth
BCT/5427U	shallow depth
BCT/6436U	full depth
BCT/7836U	full depth

Track-Guided Folding Safety Ladders

Without sacrificing aisle space, safe, secure and easy access to upper levels is provided by our track-guided folding ladder. Ladder can pivot to right or left so any section is within easy reach. Broad wooden steps, a sturdy handrail, and a hand brake are features engineered for safety. Available in our bright yellow safety color only.

- minimum aisle width to accommodate ladder is 35 1/2"
- not recommended for use with Double Width drawers
- **tracks must be ordered separately (see below)**

PART NO.	MIN. ROOM HEIGHT
LADDER/2000	106 1/4" (2700mm)
LADDER/2200	106 1/4" (2700mm)
LADDER/2500	106 1/4" (2700mm)
LADDER/3000	126" (3200mm)
LADDER/EXT*	

*must be ordered when specifying a Storage Wall ladder in conjunction with sliding doors

Track Tops and Bottoms

Order 1 track length section to match each Storage Wall section (width) you are ordering. Tracks come in pairs, top and bottom. Color: to match unit.

PART NO.	TRACK LENGTH
TRACK/36U	28 1/8" (714mm)
TRACK/54U	40 1/8" (1020mm)
TRACK/64U	46 7/8" (1190mm)
TRACK/78U	56 1/4" (1428mm)



A variety of door options can enhance the safety and security of your stored items, while protecting items on shelves from dust and environmental grime.



How to order Storage Wall doors

1. Select door style.
2. ■ Select lock type.

RG = individual
KA = keyed-alike
MA = master

EXAMPLE: to order sliding doors for a Storage Wall section that has a 2500 height vertical side frame (100 5/8" high) and is 36 units wide with an individual lock, the part number for the starter door would be **SD2500/36U-S-RG**, and the part number for the adder door would be **SD2500/36U-A-RG**.

Hinged Door Sets

Protect inventory and equipment from dirt and theft with full-height hinged doors. Economical and easy to install on single or multiple Storage Wall sections. Door sets add 2" to the depth of the Storage Wall section. Requires top and bottom universal panels with mounting holes. Painted to match the unit. To specify lock, please see instructions to left.

Hinged Door Starters

PART NO.	HEIGHT
Standard and ST width – 36 units	
DHD2000/36SW-S-■	78 3/4" (2000mm)
DHD2200/36SW-S-■	86 5/8" (2200mm)
HS width – 54 units	
DHD2000/54SW-S-■	78 3/4" (2000mm)
DHD2200/54SW-S-■	86 5/8" (2200mm)
Mid-width – 64 units	
DHD2000/64SW-S-■	78 3/4" (2000mm)
DHD2200/64SW-S-■	86 5/8" (2200mm)
Double width – 78 units	
DHD2000/78SW-S-■	78 3/4" (2000mm)
DHD2200/78SW-S-■	86 5/8" (2200mm)

Hinged Door Adders

PART NO.	HEIGHT
Standard and ST width – 36 units	
DHD2000/36SW-A-■	78 3/4" (2000mm)
DHD2200/36SW-A-■	86 5/8" (2200mm)
HS width – 54 units	
DHD2000/54SW-A-■	78 3/4" (2000mm)
DHD2200/54SW-A-■	86 5/8" (2200mm)
Mid-width – 64 units	
DHD2000/64SW-A-■	78 3/4" (2000mm)
DHD2200/64SW-A-■	86 5/8" (2200mm)
Double width – 78 units	
DHD2000/78SW-A-■	78 3/4" (2000mm)
DHD2200/78SW-A-■	86 5/8" (2200mm)

Sliding Door Sets

Doors move smoothly on ball bearings. Doors and track add an additional 5" to the depth and 1/4" to the height of the section. Painted to match the unit. To specify lock, please see instructions to left. Doors come as pairs, to cover even number of same-sized sections. To order doors for odd numbers of sections, contact your Lista representative.

Sliding Door Starters

PART NO.	HEIGHT
Standard and ST width – 36 units	
SD2000/36U-S-■	80 15/16" (2055mm)
SD2200/36U-S-■	88 13/16" (2255mm)
SD2500/36U-S-■	100 5/8" (2555mm)
SD3000/36U-S-■	120 5/16" (3055mm)
HS width – 54 units	
SD2000/54U-S-■	80 15/16" (2055mm)
SD2200/54U-S-■	88 13/16" (2255mm)
SD2500/54U-S-■	100 5/8" (2555mm)
SD3000/54U-S-■	120 5/16" (3055mm)
Mid-width – 64 units	
SD2000/64U-S-■	80 15/16" (2055mm)
SD2200/64U-S-■	88 13/16" (2255mm)
SD2500/64U-S-■	100 5/8" (2555mm)
SD3000/64U-S-■	120 5/16" (3055mm)
Double width – 78 units	
SD2000/78U-S-■	80 15/16" (2055mm)
SD2200/78U-S-■	88 13/16" (2255mm)
SD2500/78U-S-■	100 5/8" (2555mm)
SD3000/78U-S-■	120 5/16" (3055mm)

Sliding Door Adders

PART NO.	HEIGHT
Standard and ST width – 36 units	
SD2000/36U-A-■	80 15/16" (2055mm)
SD2200/36U-A-■	88 13/16" (2255mm)
SD2500/36U-A-■	100 5/8" (2555mm)
SD3000/36U-A-■	120 5/16" (3055mm)
HS width – 54 units	
SD2000/54U-A-■	80 15/16" (2055mm)
SD2200/54U-A-■	88 13/16" (2255mm)
SD2500/54U-A-■	100 5/8" (2555mm)
SD3000/54U-A-■	120 5/16" (3055mm)
Mid-width – 64 units	
SD2000/64U-A-■	80 15/16" (2055mm)
SD2200/64U-A-■	88 13/16" (2255mm)
SD2500/64U-A-■	100 5/8" (2555mm)
SD3000/64U-A-■	120 5/16" (3055mm)
Double width – 78 units	
SD2000/78U-A-■	80 15/16" (2055mm)
SD2200/78U-A-■	88 13/16" (2255mm)
SD2500/78U-A-■	100 5/8" (2555mm)
SD3000/78U-A-■	120 5/16" (3055mm)



Storage Wall® Doors

Full height end panel



Vertical Tambour Doors

Individual Storage Wall sections can be locked with vertical tambour door. Vertical door rides effortlessly on tracks mounted to the vertical side frames and retracts into a box mounted on the top of the section. The box adds 12 3/4" to the height of the unit. The additional framing for the slides and lock add 2 3/8" to the depth of the unit. Requires universal panel with mounting holes at top. Box and frame are painted to match the unit but door comes in dove gray only. To specify lock, please see instructions on page 8.

PART NO.	TOTAL HEIGHT
Standard and ST width – 36 units	
VD1450/36U-■	69 7/8" (1773mm)
VD2000/36U-■	91 1/2" (2323mm)
VD2200/36U-■	99 3/8" (2523mm)
VD2500/36U-■	111 1/8" (2823mm)
HS width – 54 units	
VD1450/54U-■	69 7/8" (1773mm)
VD2000/54U-■	91 1/2" (2323mm)
VD2200/54U-■	99 3/8" (2523mm)
VD2500/54U-■	111 1/8" (2823mm)
Mid-width – 64 units	
VD1450/64U-■	69 7/8" (1773mm)
VD2000/64U-■	91 1/2" (2323mm)
VD2200/64U-■	99 3/8" (2523mm)
VD2500/64U-■	111 1/8" (2823mm)
Double width – 78 units	
VD1450/78U-■	69 7/8" (1773mm)
VD2000/78U-■	91 1/2" (2323mm)
VD2200/78U-■	99 3/8" (2523mm)
VD2500/78U-■	111 1/8" (2823mm)

Tambour Door Full Height End Panels

Optional end panels extend up to the top of the tambour door box to enclose the ends of the completed unit for a finished appearance. Painted to match the unit.

PART NO.	HEIGHT	DEPTH
EP1450/VD	69 7/8"	full
EP2000/VD	91 1/2"	full
EP2200/VD	99 3/8"	full
EP2500/VD	111 1/8"	full
EP1450/VD/B255	69 7/8"	shallow
EP2000/VD/B255	91 1/2"	shallow
EP2200/VD/B255	99 3/8"	shallow
EP2500/VD/B255	111 1/8"	shallow



Full Height Inner Panels

Provides a clean, neat appearance, as well as added security for Storage Wall section enclosed with a door. Steel sheet panel fills entire inner area of a vertical side frame. Installs easily. Order to match height of vertical side frames. Painted to match the unit.

PART NO.	FOR USE WITH
Full depth – 36 units	
IP1450/36U-■	1450VSF
IP2000/36U-■	2000VSF
IP2200/36U-■	2200VSF
IP2500/36U-■	2500VSF
IP3000/36U-■	3000VSF
Shallow depth – 27 units	
IP1450/27U-■	1450VSF/B255
IP2000/27U-■	2000VSF/B255
IP2200/27U-■	2200VSF/B255
IP2500/27U-■	2500VSF/B255
IP3000/27U-■	3000VSF/B255

